


## Low Relaxation PC Bar

|                        |   |  |                            |                                       |
|------------------------|---|--|----------------------------|---------------------------------------|
| Diameter               | 7.10, 9.00 & 10.70 mm                                 |  |                            |                                       |
| International Standard | JIS G3137, SBPDL 1275/1420                            |  |                            |                                       |
| Indentation Type       | Spiral grooved  |  |                            |                                       |
| Lay direction          | Anti-clock wise                                       |  |                            |                                       |
| Packing                | Wrapped with PP (polypropylene) woven or Stretch film |  |                            |                                       |
| Packing dimension      | ID – 2000 mm, OD – 2400 mm                            |  |                            |                                       |
| Coil weight            | Approximately 800 to 1000 kg per coil                 |  |                            |                                       |
| Elongation %           | Minimum 5.0   |  |                            |                                       |
| Relaxation %           | Minimum 2.5   |  |                            |                                       |
|                        | Min. Tensile Strength<br>N/mm <sup>2</sup>            | Min. Yield Stress<br>N/mm <sup>2</sup> | Nominal weight<br>kg/meter | Nominal Steel Area<br>mm <sup>2</sup> |
| 7.10 mm                | 1420  | 1275                                   | 0.315                      | 40.0                                  |
| 9.00 mm                | 1420  | 1275                                   | 0.500                      | 64.0                                  |
| 10.70mm                | 1420  | 1275                                   | 0.710                      | 90.0                                  |
| Application            | Spun piles and poles                                  |  |                            |                                       |

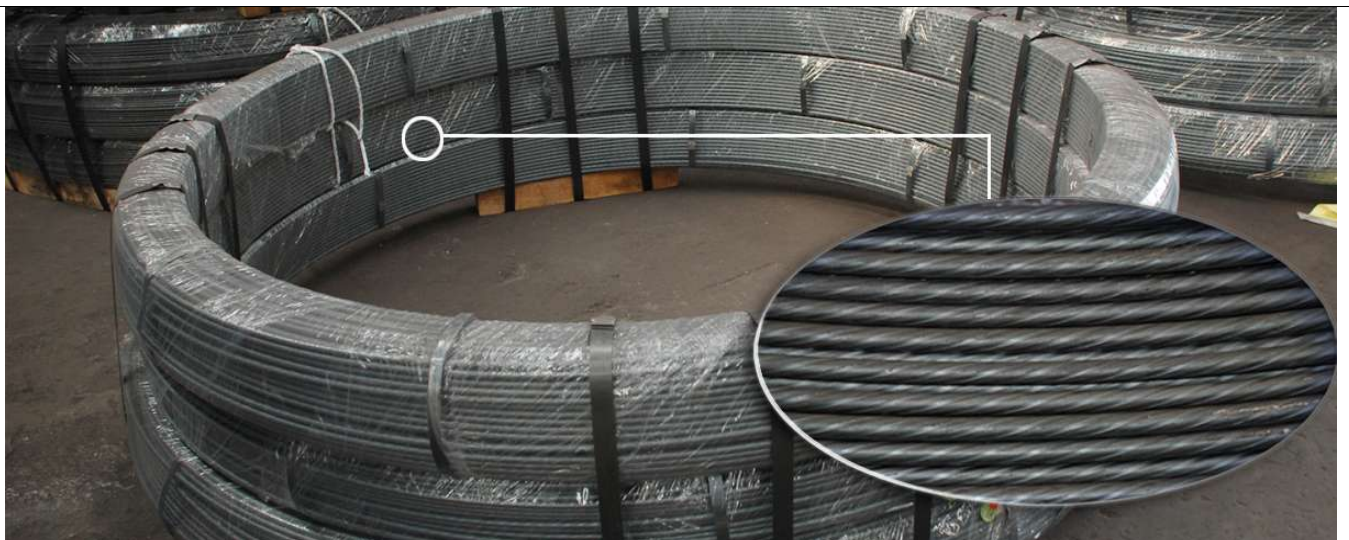

**Southern PC Steel Sdn. Bhd. (55573-U)**

PO Box 7085, 40702 Shah Alam.

Factory: Lot 4808, Jalan Utas 15/7, 40000 Shah Alam, Selangor, Malaysia.

Tel: (603) 55191501

Fax: (603) 55193369

Website: <http://www.southsteel.com>